



DSCA34

Linearized 2- or 3-Wire RTD Input Signal Conditioners

FEATURES

- INTERFACES TO 100Ω PLATINUM OR 120Ω NICKEL RTDs
- LINEARIZES RTD SIGNAL
- INDUSTRY STANDARD OUTPUT OF EITHER 0-10V, 0-20mA, or 4-20mA
- 1500Vrms TRANSFORMER ISOLATION
- ANSI/IEEE C37.90.1-1989 TRANSIENT PROTECTION
- INPUT PROTECTED TO 240VAC CONTINUOUS
- TRUE 3-WAY ISOLATION
- WIDE RANGE OF SUPPLY VOLTAGE
- 160dB CMR
- 85dB NMR AT 60Hz, 80dB at 50Hz
- ±0.08% ACCURACY
- ±0.025% CONFORMITY
- EASILY MOUNTS ON STANDARD DIN RAIL
- CSA AND FM APPROVALS PENDING

DESCRIPTION

Each DSCA34 RTD input module provides a single channel of RTD input which is filtered, isolated, amplified, linearized, and converted to a high level voltage output. Signal filtering is accomplished with a five-pole filter which provides 85dB of normal-mode-rejection at 60Hz and 80dB at 50Hz. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

RTD excitation is provided from the module using a precision current source. Lead compensation is achieved by matching two current paths which cancels the effects of lead resistance. The excitation current is small (approx. 0.25mA) which minimizes self-heating of the RTD.

Module output is either voltage or current. For current output models a dedicated loop supply is provided at terminal 3 (+OUT) with loop return located at terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1-1989. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Signal and power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration, however, zero and span settings are adjustable up to ±3% to accommodate situations where fine-tuning is desired. The adjustments are made using potentiometers located under the front panel label and are non-interactive for ease of use.

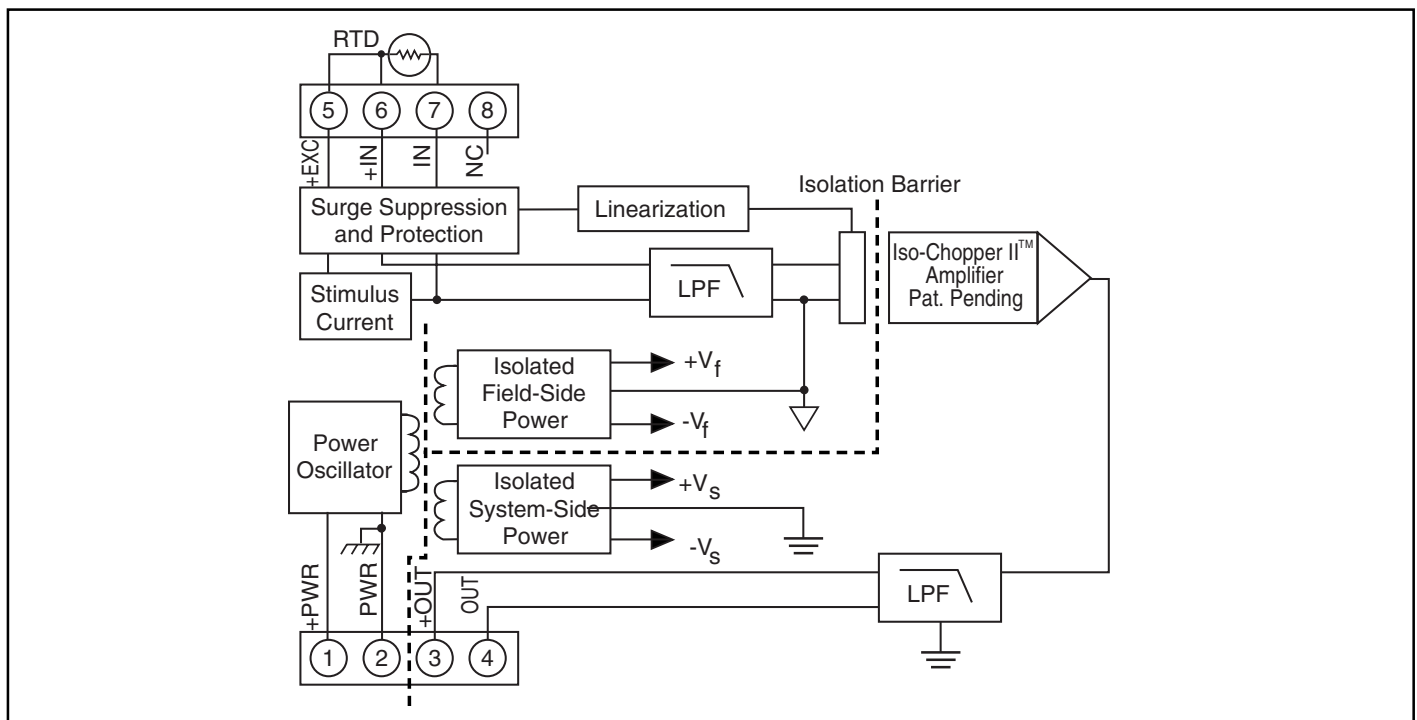


Fig 1: DSCA34 Block Diagram

SPECIFICATIONS Typical at T_A=+25°C and +24V supply voltage

Module	DSCA34
Input Range Limits	-200°C to +850°C (100Ω Pt) -80°C to +320°C (120Ω Ni)
Input Protection	
Continuous	240Vrms max
Transient	ANSI/IEEE C37.90.1-1989
Sensor Excitation Current	≈ 250μA
Lead Resistance Effect	+0.02°C/Ω
Output Range	See Ordering Information
Load Resistance (I _{OUT})	600Ω max
Current Limit	8mA (V _{OUT}), 30mA (I _{OUT})
Output Protection	
Short to Ground	Continuous
Transient	ANSI/IEEE C37.90.1-1989
CMV, Input to Output, Input to Power	
Continuous	1500Vrms max
Transient	ANSI/IEEE C37.90.1-1989
CMV, Output to Power	
Continuous	50VDC max
CMR (50Hz or 60Hz)	160dB
Accuracy	See Ordering Information
Conformity	±0.025% (100Ω Pt) ±0.07% (120Ω Ni)
Adjustability	±3% zero and span
Stability	
Input Offset	±1μV/°C
Output Offset	±6ppm/°C (V _{OUT}), ±20ppm/°C (I _{OUT})
Gain	±60ppm/°C
Output Noise, 100kHz Bandwidth	250μVrms (V _{OUT}), 1μArms (I _{OUT})
Bandwidth, -3dB	3Hz
NMR	85dB at 60Hz, 80dB at 50Hz
Response Time, 90% Span	250ms
Power Supply	
Voltage	15V to 30V
Current	25mA (V _{OUT}), 45mA (I _{OUT})
Sensitivity	±0.0001%/°
Protection	
Reverse Polarity	Continuous
Transient	ANSI/IEEE C37.90.1-1989
Environmental	
Operating Temp. Range	-40°C to +80°C
Storage Temp. Range	-40°C to +80°C
Relative Humidity	0 to 95% Noncondensing
Emissions	EN50081-1, ISM Group 1, Class A (Radiated, Conducted)
Immunity	EN50082-1, ISM Group 1, Class A (ESD, RF, EFT)
Mechanical Dimensions (h)(w)(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)
Mounting	DIN EN 50022 -35x7.5 or -35x15 rail

**RTD STANDARDS

TYPE	ALPHA COEFFICIENT	DIN	JIS
100Ω Pt	0.00385	DIN 43760	JIS C 1604-1989
120Ω Ni	0.00672		

* OUTPUT RANGE	PART NO. SUFFIX	EXAMPLE
1. -10V to +10V	NONE	N/A
2. 0V to +10V	NONE	DSCA34-01
3. 4 to 20mA	C	DSCA34-01C
4. 0 to 20mA	E	DSCA34-01E

ORDERING INFORMATION

MODEL	INPUT RANGE	OUTPUT RANGE*	ACCURACY‡	
100Ω Pt **				
DSCA34-01	-100°C to +100°C (-148°F to +212°F)	2, 3, 4	±0.08%	±0.16°C
DSCA34-02	0°C to +100°C (+32°F to +212°F)	2, 3, 4	±0.10%	±0.10°C
DSCA34-03	0°C to +200°C (+32°F to +392°F)	2, 3, 4	±0.08%	±0.16°C
DSCA34-04	0°C to +600°C (+32°F to +1112°F)	2, 3, 4	±0.05%	±0.30°C
DSCA34-05	-50°C to +350°C (-58°F to +662°F)	2, 3, 4	±0.05%	±0.20°C
120Ω Ni **				
DSCA34N-01	0°C to +300°C (+32°F to +572°F)	2, 3, 4	±0.15%	±0.45°C

‡ Includes conformity, hysteresis and repeatability.